



2.3 Fuel Models

Some key properties of fuel:

1. Mass
2. Shape
3. Spatial configuration or arrangement
4. Heat content
5. Moisture
6. Type
7. Position

Together these create a **FUEL MODEL**


Fuel models

- A fuel model is a way of characterizing the fuel of a location
- Simplifies some of the complexity
- Provides a range of fuel mass values (kg/ha) in different fuel sizes
- Fuel models are used extensively in fire behavior computer modeling

Two main classification systems:

1. Hal Anderson (1982)

1. Based on original systems by Albini (1976) and Rothermel (1972)
2. Provided a consistent basis for classifying wildland fuels
3. 13 fuel types (grouped by grass, shrub, timber, and logging slash)
4. Linked to fire behavior parameters (fuel mass, size, fuel bed depth, moisture, etc.), National Fire Danger Rating System (NFDRS), BehavePlus

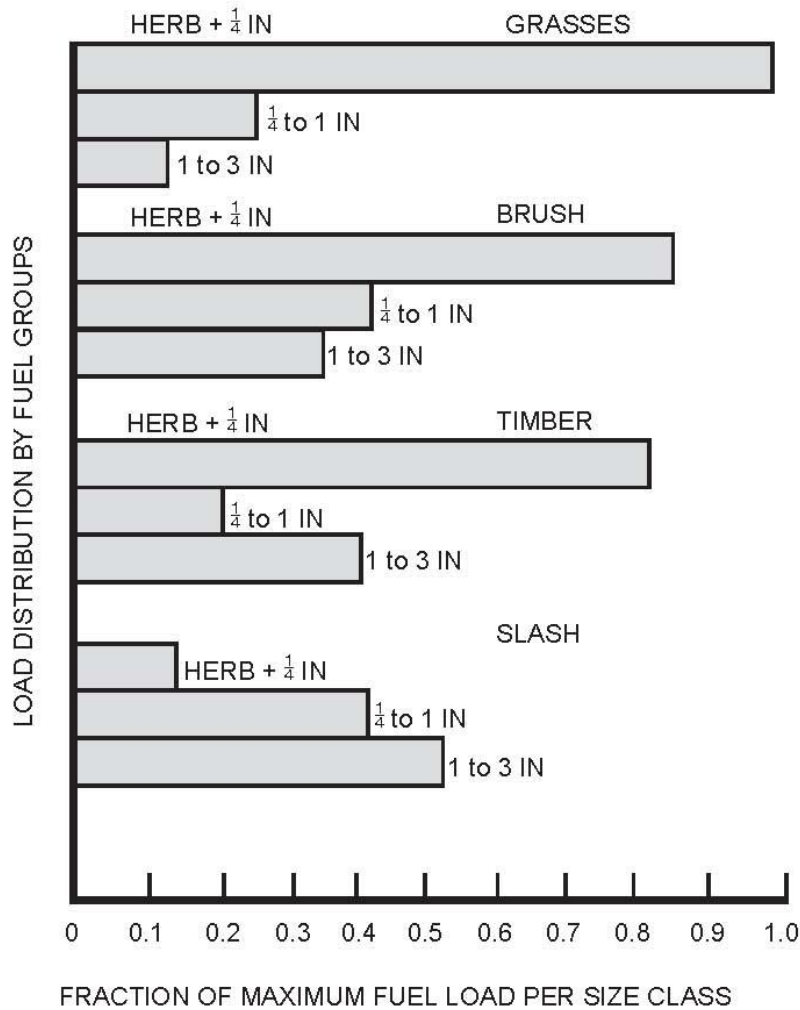


Note the proportions of small, medium, and large fuels in the major fuel model categories

Anderson 1982, Fig. 1



Fuel Model 2: Timber with grass understory

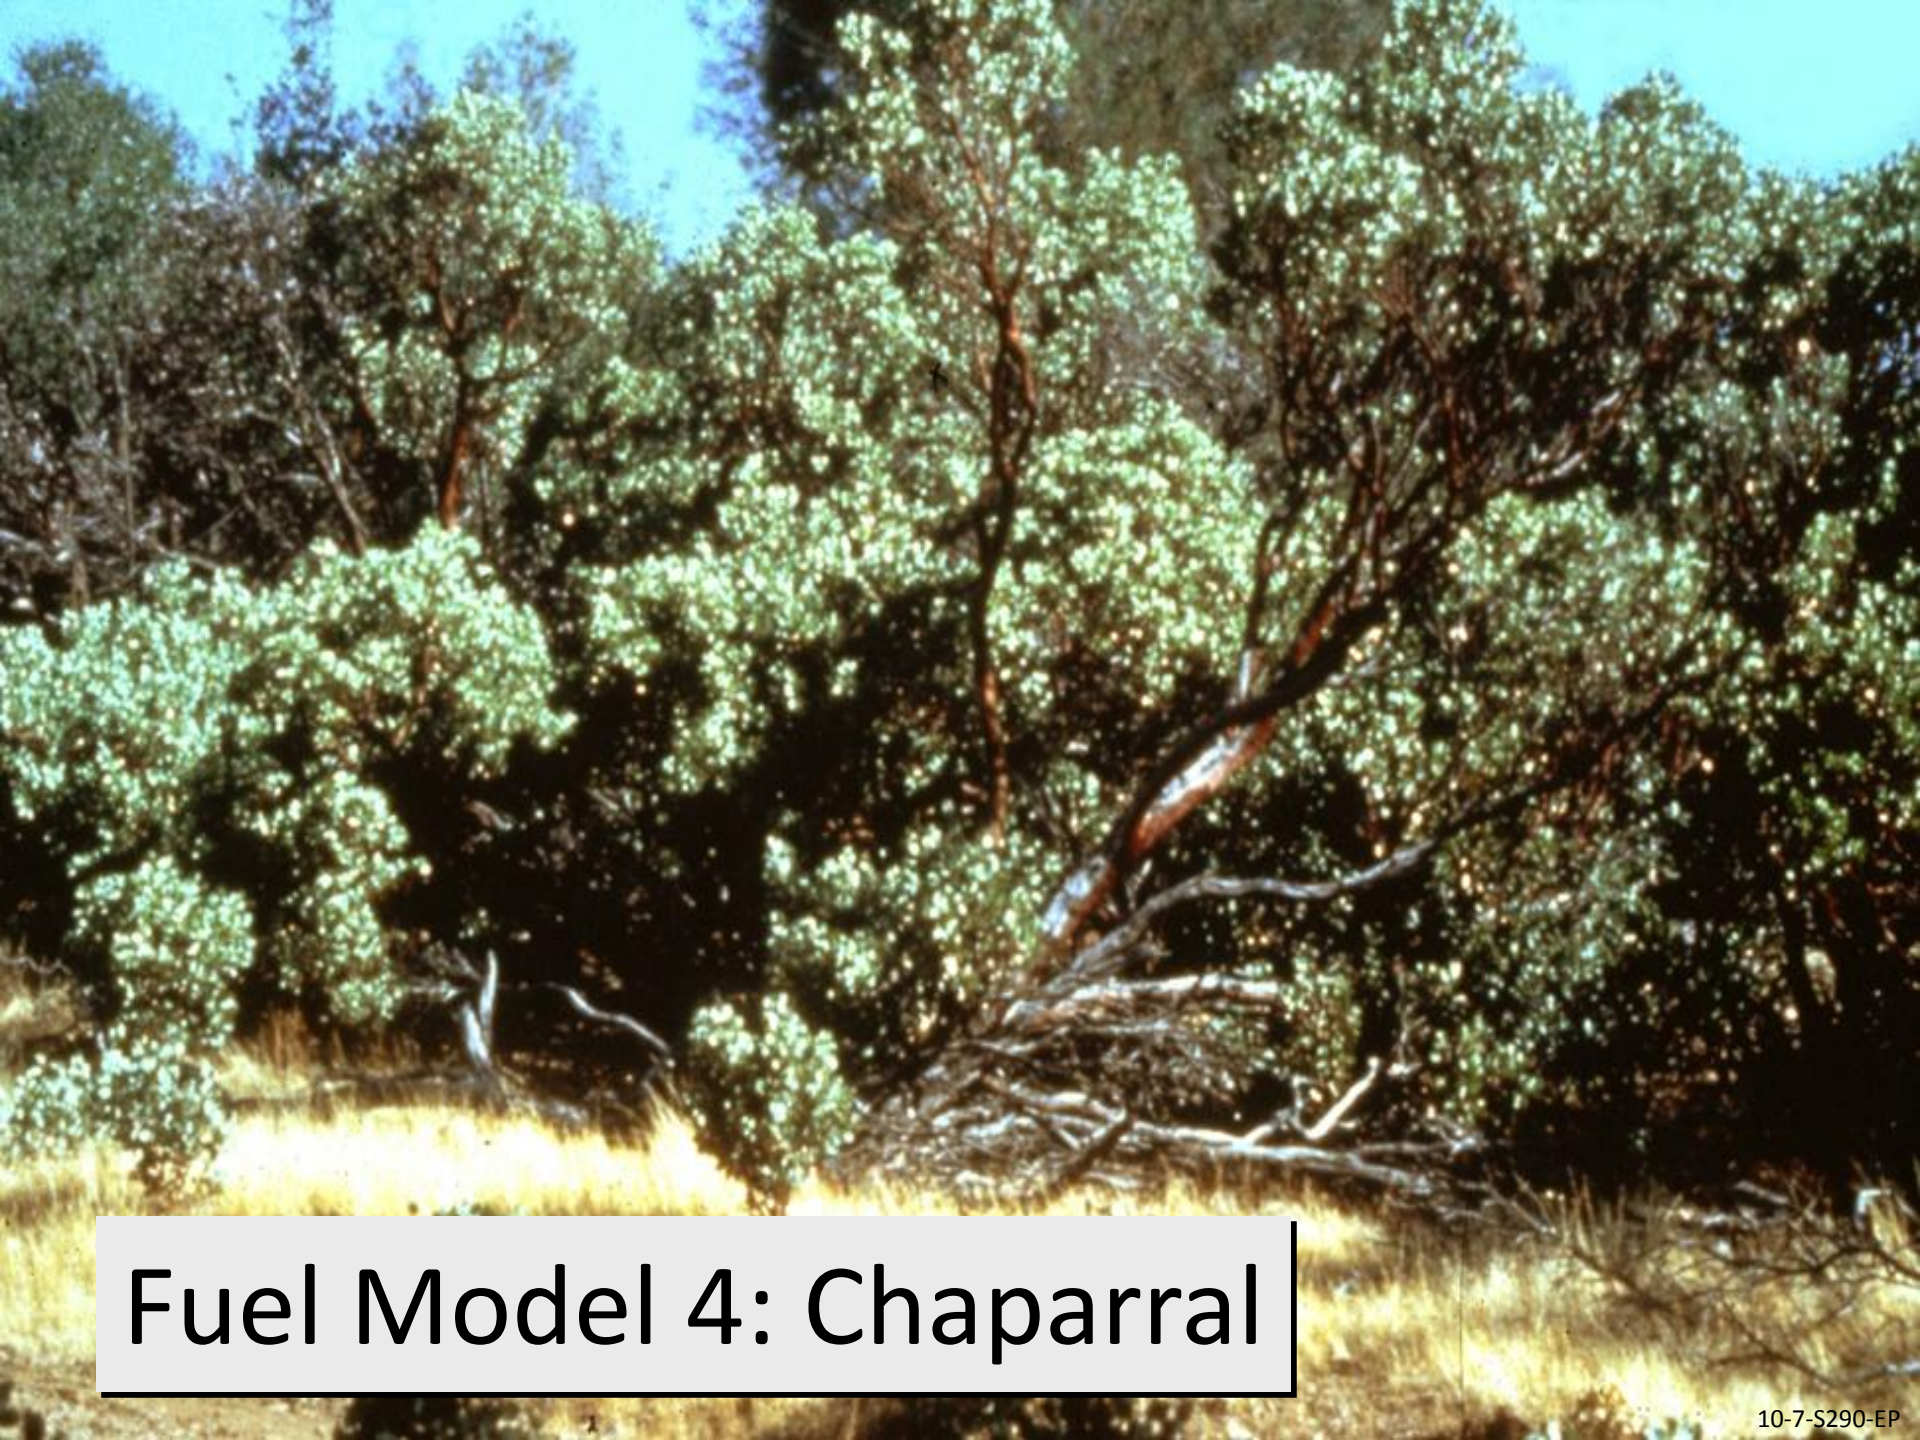

Fuel Model 4: Chaparral

Fuel Model 5: Brush 2 ft



Fuel Model 7: Southern rough



Fuel Model 10: Timber with litter understory



2. Scott and Burgan (2005)

1. Biggest innovations in fuel classification since 1980s
2. Broke out fuel types into finer, more accurate classes (45 models)
3. Includes dynamic element (herbaceous live fuels transfer to dead component as fuels dry out)

Scott, Joe H.; Burgan, Robert E. 2005. **Standard fire behavior fuel models: a comprehensive set for use with Rothermel's surface fire spread model. Gen. Tech. Rep. RMRS-GTR-153.** Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station. 72 p.

Table 7—Fuel model parameters.

Fuel model code	Fuel load (t/ac)					Fuel model type ^a	SAV ratio (1/ft) ^b			Fuel bed depth (ft)	Dead fuel extinction moisture (percent)	Heat content BTU/lb ^c
	1-hr	10-hr	100-hr	Live herb	Live woody		Dead 1-hr	Live herb	Live woody			
GR1	0.10	0.00	0.00	0.30	0.00	dynamic	2200	2000	9999	0.4	15	8000
GR2	0.10	0.00	0.00	1.00	0.00	dynamic	2000	1800	9999	1.0	15	8000
GR3	0.10	0.40	0.00	1.50	0.00	dynamic	1500	1300	9999	2.0	30	8000
GR4	0.25	0.00	0.00	1.90	0.00	dynamic	2000	1800	9999	2.0	15	8000
GR5	0.40	0.00	0.00	2.50	0.00	dynamic	1800	1600	9999	1.5	40	8000
GR6	0.10	0.00	0.00	3.40	0.00	dynamic	2200	2000	9999	1.5	40	9000
GR7	1.00	0.00	0.00	5.40	0.00	dynamic	2000	1800	9999	3.0	15	8000
GR8	0.50	1.00	0.00	7.30	0.00	dynamic	1500	1300	9999	4.0	30	8000
GR9	1.00	1.00	0.00	9.00	0.00	dynamic	1800	1600	9999	5.0	40	8000
GS1	0.20	0.00	0.00	0.50	0.65	dynamic	2000	1800	1800	0.9	15	8000
GS2	0.50	0.50	0.00	0.60	1.00	dynamic	2000	1800	1800	1.5	15	8000
GS3	0.30	0.25	0.00	1.45	1.25	dynamic	1800	1600	1600	1.8	40	8000
GS4	1.90	0.30	0.10	3.40	7.10	dynamic	1800	1600	1600	2.1	40	8000
SH1	0.25	0.25	0.00	0.15	1.30	dynamic	2000	1800	1600	1.0	15	8000
SH2	1.35	2.40	0.75	0.00	3.85	N/A	2000	9999	1600	1.0	15	8000
SH3	0.45	3.00	0.00	0.00	6.20	N/A	1600	9999	1400	2.4	40	8000
SH4	0.85	1.15	0.20	0.00	2.55	N/A	2000	1800	1600	3.0	30	8000
SH5	3.60	2.10	0.00	0.00	2.90	N/A	750	9999	1600	6.0	15	8000
SH6	2.90	1.45	0.00	0.00	1.40	N/A	750	9999	1600	2.0	30	8000
SH7	3.50	5.30	2.20	0.00	3.40	N/A	750	9999	1600	6.0	15	8000
SH8	2.05	3.40	0.85	0.00	4.35	N/A	750	9999	1600	3.0	40	8000
SH9	4.50	2.45	0.00	1.55	7.00	dynamic	750	1800	1500	4.4	40	8000
TU1	0.20	0.90	1.50	0.20	0.90	dynamic	2000	1800	1600	0.6	20	8000
TU2	0.95	1.80	1.25	0.00	0.20	N/A	2000	9999	1600	1.0	30	8000
TU3	1.10	0.15	0.25	0.65	1.10	dynamic	1800	1600	1400	1.3	30	8000
TU4	4.50	0.00	0.00	0.00	2.00	N/A	2300	9999	2000	0.5	12	8000
TU5	4.00	4.00	3.00	0.00	3.00	N/A	1500	9999	750	1.0	25	8000
TL1	1.00	2.20	3.60	0.00	0.00	N/A	2000	9999	9999	0.2	30	8000
TL2	1.40	2.30	2.20	0.00	0.00	N/A	2000	9999	9999	0.2	25	8000
TL3	0.50	2.20	2.80	0.00	0.00	N/A	2000	9999	9999	0.3	20	8000
TL4	0.50	1.50	4.20	0.00	0.00	N/A	2000	9999	9999	0.4	25	8000
TL5	1.15	2.50	4.40	0.00	0.00	N/A	2000	9999	1600	0.6	25	8000
TL6	2.40	1.20	1.20	0.00	0.00	N/A	2000	9999	9999	0.3	25	8000
TL7	0.30	1.40	8.10	0.00	0.00	N/A	2000	9999	9999	0.4	25	8000
TL8	5.80	1.40	1.10	0.00	0.00	N/A	1800	9999	9999	0.3	35	8000
TL9	6.65	3.30	4.15	0.00	0.00	N/A	1800	9999	1600	0.6	35	8000
SB1	1.50	3.00	11.00	0.00	0.00	N/A	2000	9999	9999	1.0	25	8000
SB2	4.50	4.25	4.00	0.00	0.00	N/A	2000	9999	9999	1.0	25	8000
SB3	5.50	2.75	3.00	0.00	0.00	N/A	2000	9999	9999	1.2	25	8000
SB4	5.25	3.50	5.25	0.00	0.00	N/A	2000	9999	9999	2.7	25	8000

^a Fuel model type does not apply to fuel models without live herbaceous load.

^b The value 9999 was assigned in cases where there is no load in a particular fuel class or category

^c The same heat content value was applied to both live and dead fuel categories.


GR2 (102)

Low Load, Dry Climate Grass (Dynamic)



Description: The primary carrier of fire in GR2 is grass, though small amounts of fine dead fuel may be present. Load is greater than GR1, and fuelbed may be more continuous. Shrubs, if present, do not affect fire behavior.

Fine fuel load (t/ac)	1.10
Characteristic SAV (ft-1)	1820
Packing ratio (dimensionless)	0.00158
Extinction moisture content (percent)	15

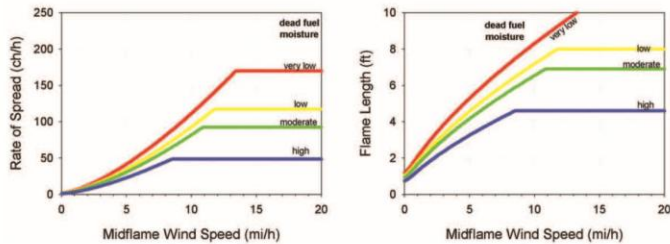


TL1 (181)

Low Load Compact Conifer Litter



Description: The primary carrier of fire in TL1 is compact forest litter. Light to moderate load, fuels 1 to 2 inches deep. May be used to represent a recently burned forest. Spread rate is very low; flame length very low.

Fine fuel load (t/ac)	1.0
Characteristic SAV (ft-1)	1716
Packing ratio (dimensionless)	0.04878
Extinction moisture content (percent)	30

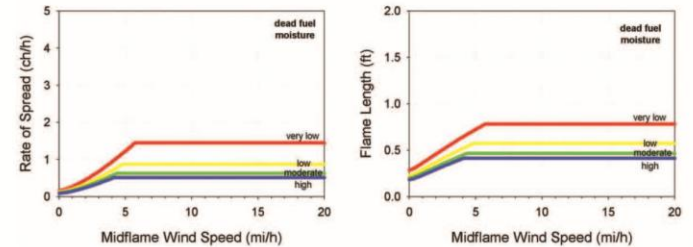



Next: Fire weather!